


**MATERIAL STANDARD**

**CONNECTORS  
COPPER SPLICING SLEEVES  
FULL TENSION**

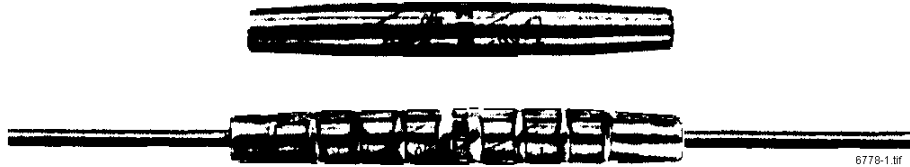

**Copper Splicing Sleeves** installed by the compression method shall be designed to develop the full rated strength of hard-drawn and medium-drawn copper conductors for which they are intended. They shall meet all the applicable requirements of NEMA Std. Pub. No. CC1, "Electric Power Connectors."

**Identification:** The sleeves shall be clearly marked with the manufacturer's trade-mark, conductor type and size, die groove, and catalog number.

**Reference Specifications:** NEMA CCI, latest revision.

**Stock Unit:** EA

Stock Number	Wire Size AWG-kcmil	Tool Groove	Approved Manufacturers	
			Nicopress	Burndy
677796	10 Sol	C	1-102C	----
677802	8 Sol	J	1-128J	----
677803	6 Sol	J	1-162J	YDS6W
677804	4 Sol	M	1-204M	YDS4W
677808	2 Sol	X	1-258X	----
677901	2/0 Str	G3	1-365/7G3	----
677903	4/0 Str	H5	1-460/7H5	----

ORIGINATOR	STANDARDS COORDINATOR	STANDARDS SUPERVISOR	UNIT DIRECTOR
<i>Jim S. Horn</i>	<i>Charles L. Shaffer</i>	<i>John C. Skinner</i>	<i>Betty Robm</i>